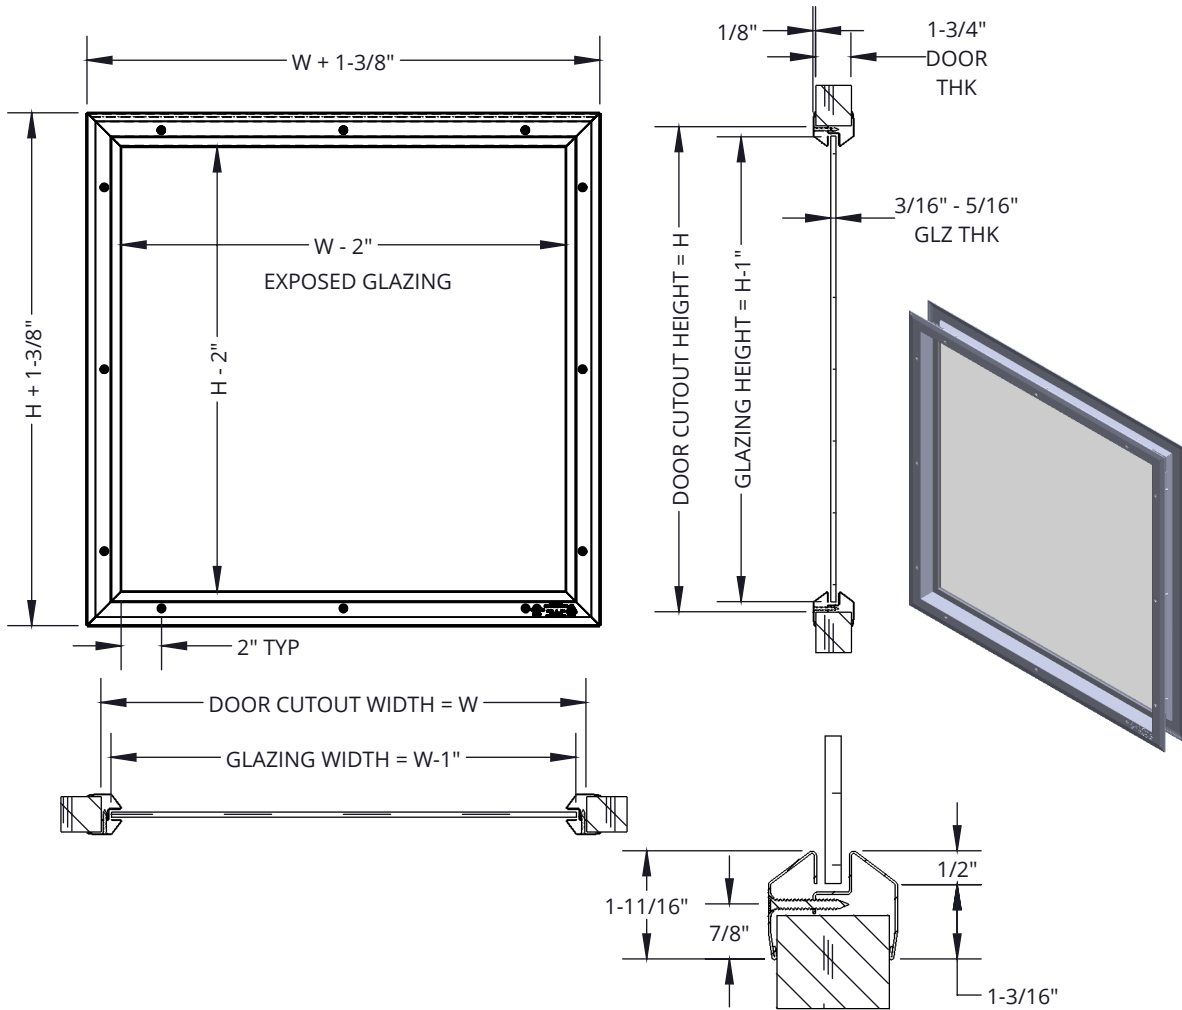


UP TO 3 HOURS

VISION LITE - SLIMLINE™ SERIES - VSLH

Low profile, hem-strengthened Slimline vision lites mount flush to the door with self-attaching, single-sided fasteners. A minimal 1/8" protrusion provides a clean, aesthetic look. VSLH models are for standard door and glazing thicknesses.



SPECIFICATIONS:

Application:

For standard door thickness: 1-3/4" and standard glazing thickness 3/16" - 5/16".
 For standard door thickness 1-3/4" and non-standard glazing thickness of 3/8 - 1-11/16" see VSIG.
 For non-standard door thickness: 1"-3" and non-standard glazing thickness of 3/16" - 1-11/16" see VSIG.

Frame Material: 20 gauge cold rolled steel
Standard Finish: Mineral bronze powder coat
Fasteners: #8A x 1-1/4" Flathead Phillips screws to match finish
Size:

Minimum: 4" x 4"
Maximum: Maximum size fire-rating is determined by glass listing (for doors) and door manufacturer's listing
 Door Cutout = Order Size (W x H)
 Glazing Size = Order Size minus 1" (W - 1" x H - 1")
 Exposed Glazing = Order Size minus 2" (W - 2" x H - 2")

FIRE RATINGS:

UL listed and labeled/stamped to ANSI/UL 10B, ANSI/UL 10C and CAN/ULC S104 when properly installed in rated and approved door. Ratings up to 180 minutes can be achieved depending on exposed glazing size and area.

OPTIONS:


Materials: 20 gauge 304 Stainless steel, galvanized steel, zinc-plated steel
Mullions: 1" x 5/8" welded-on, formed mullions for a divided lite look that uses one (1) pane of glass
PAKs: Vision lite, glazing, and glazing tape combined
Compatible Air Louvers Glazing:
Fire-Rated: PPF, FL, FLP, FGL WS
Non-Rated: TEMP
Other: Torx screws

TAPE WHEN SOLD SEPARATELY

Qty	Model	Description Dimensions
	GTAPE 200B	Standard glazing tape 1/16" 1/16" thick x 3/8" wide x 200 ft
	FGS3000S90	Intumescent tape for wired glass 5/64" thick x 7/16" wide x 16 ft

Refer to glazing tape submittal for more information

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.

 <p>AIR LOUVERS 9702 Newton Avenue S, Bloomington, MN 55431</p>	<p>800-554-6077 sales@activarcpg.com www.activarcpg.com</p>	<p>Distributor:</p>	<p>Project:</p>
		<p>Contractor:</p>	<p>Approved By:</p>
		<p>Date:</p>	<p>Architect:</p>
		<p>Scale: N/A</p>	<p>Page 1 of 2</p>

VISION LITE - SLIMLINE SERIES - VSLH

VSLH: COMMON SIZES

QTY	MODEL / COLOR	ROUGH OPENING	WT (LBS)	QTY	MODEL / COLOR	ROUGH OPENING	WT (LBS)
BRONZE				BRONZE			
	VSLH-0535B	5" x 35"	5		VSLH-2464B	24" x 64"	17
	VSLH-0627B	6" x 27"	4		VSLH-2466B	24" x 66"	18
	VSLH-0630B	6" x 30"	5	GRAY			
	VSLH-0636B	6" x 36"	6		VSLH-0535G	5" x 35"	5
	VSLH-0722B	7" x 22"	4		VSLH-0627G	6" x 27"	4
	VSLH-0832B	8" x 32"	5		VSLH-0722G	7" x 22"	4
	VSLH-0836B	8" x 36"	6		VSLH-0832G	8" x 32"	5
	VSLH-1212B	12" x 12"	3		VSLH-1212G	12" x 12"	3
	VSLH-1818B	18" x 18"	5		VSLH-2424G	24" x 24"	7
	VSLH-2060B	20" x 60"	16		VSLH-2430G	24" x 30"	9
	VSLH-2424B	24" x 24"	7		VSLH-2432G	24" x 32"	9
	VSLH-2430B	24" x 30"	9		VSLH-2436G	24" x 36"	9
	VSLH-2432B	24" x 32"	9		VSLH-2464G	24" x 64"	17
	VSLH-2434B	24" x 34"	10				
	VSLH-2436B	24" x 36"	10				
	VSLH-2460B	24" x 60"	16				
	VSLH-2462B	24" x 62"	18				












VSLH PAKS: VISION LITE + GLAZING + TAPE APPLIED

QTY	MODEL / COLOR	ROUGH OPENING	WT (LBS)	FIRE-RATING	GLAZING	QTY	MODEL / COLOR	ROUGH OPENING	WT (LBS)	FIRE-RATING	GLAZING
BRONZE						BRONZE					
	VSLH-1212B PPF PAK	12" x 12"	6	180	Pyran Platinum F		VSLH-1212B TEMP PAK	12" x 12"	6	Non Fire-Rated	Tempered Glass
	VSLH-0535B PPF PAK	5" x 35"	9	180			VSLH-0535B TEMP PAK	5" x 35"	9		
	VSLH-0627B PPF PAK	6" x 27"	8	180			VSLH-0627B TEMP PAK	6" x 27"	8		
	VSLH-0722B PPF PAK	7" x 22"	7	180			VSLH-0722B TEMP PAK	7" x 22"	7		
	VSLH-2430B PPF PAK	24" x 30"	23	90			VSLH-0832B TEMP PAK	8" x 32"	10		
	VSLH-1212B WS PAK	12" x 12"	7	90	Wireshield		VSLH-0836B TEMP PAK	8" x 36"	11		
	VSLH-0535B WS PAK	5" x 35"	10	90			VSLH-2424B TEMP PAK	24" x 24"	17		
	VSLH-0627B WS PAK	6" x 27"	9	90			VSLH-2430B TEMP PAK	24" x 30"	22		
	VSLH-0722B WS PAK	7" x 22"	9	90			VSLH-2432B TEMP PAK	24" x 32"	23		
	VSLH-2430B WS PAK	24" x 30"	28	45			VSLH-2436B TEMP PAK	24" x 36"	25		
							VSLH-2460B TEMP PAK	24" x 60"	41		
							VSLH-2464B TEMP PAK	24" x 64"	44		

MADE-TO-ORDER SLIMLINE™ VISION LITE - EXAMPLE: VSLH-2432B FL PAK-T

QTY	MODEL	MATERIAL	MULLIONS OPTIONS	- WIDTH	HEIGHT	FINISH	PAK GLAZING OPTIONS	OPTIONS
	VSLH	Cold Rolled Steel - Std.	None	None		B Bronze - Std.	None	None
		S Stainless Steel	A (1 Column)	2 (2 Rows)		AB AMS Beige	FL PAK 3/16" Firelite NT	-T Torx Screw
		G Galvannealed Steel	B (2 Column)	3 (3 Rows)		SB SC Beige	PPF PAK 3/16" Pyran Platinum F	
		E Zinc-Plated Steel	C (3 Column)	4 (4 Rows)		S Sand	FGL PAK 1/4" Fireglass 20	
				5 (5 Rows)		G Gray	TEMP PAK 1/4" Non-rated Tempered	
						SI Silver	WS PAK 1/4" Wireshield	
						W White	FLP PAK 5/16" Firelite Plus	
						BK Black	Other PAK - specify below:	
						FB Flat Black		
						BA Brass		
						Other - specify below:		

MULLIONS

	2	3	4	5
A	 A2 Min: 6" x 6"	 A3 Min: 6" x 7"	 A4 Min: 6" x 9"	 A5 Min: 6" x 11"
B	 B2 Min: 6" x 6"	 B3 Min: 6" x 7"	 B4 Min: 6" x 9"	 B5 Min: 6" x 11"
C	--	 C3 Min: 7" x 7"	 C4 Min: 7" x 9"	 C5 Min: 7" x 11"

MULLION OPTIONS

1" x 5/8" Standard Mullion
1/2" x 1/2" Optional Size
1/2" x 3/4" Optional Size

Min. Lite Size for Mullions varies with columns and rows, see chart.



It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.