


UP TO 3 HOURS

VISION LITE - THURBOLT™ WITH 12 GAUGE SECURITY GRILLES - VLFSG

Standard, multi-purpose, thru-bolted square profile vision lite with security grille each side of glazing, For standard door thickness 1-3/4" and glazing thickness 3/16" - 1/4".

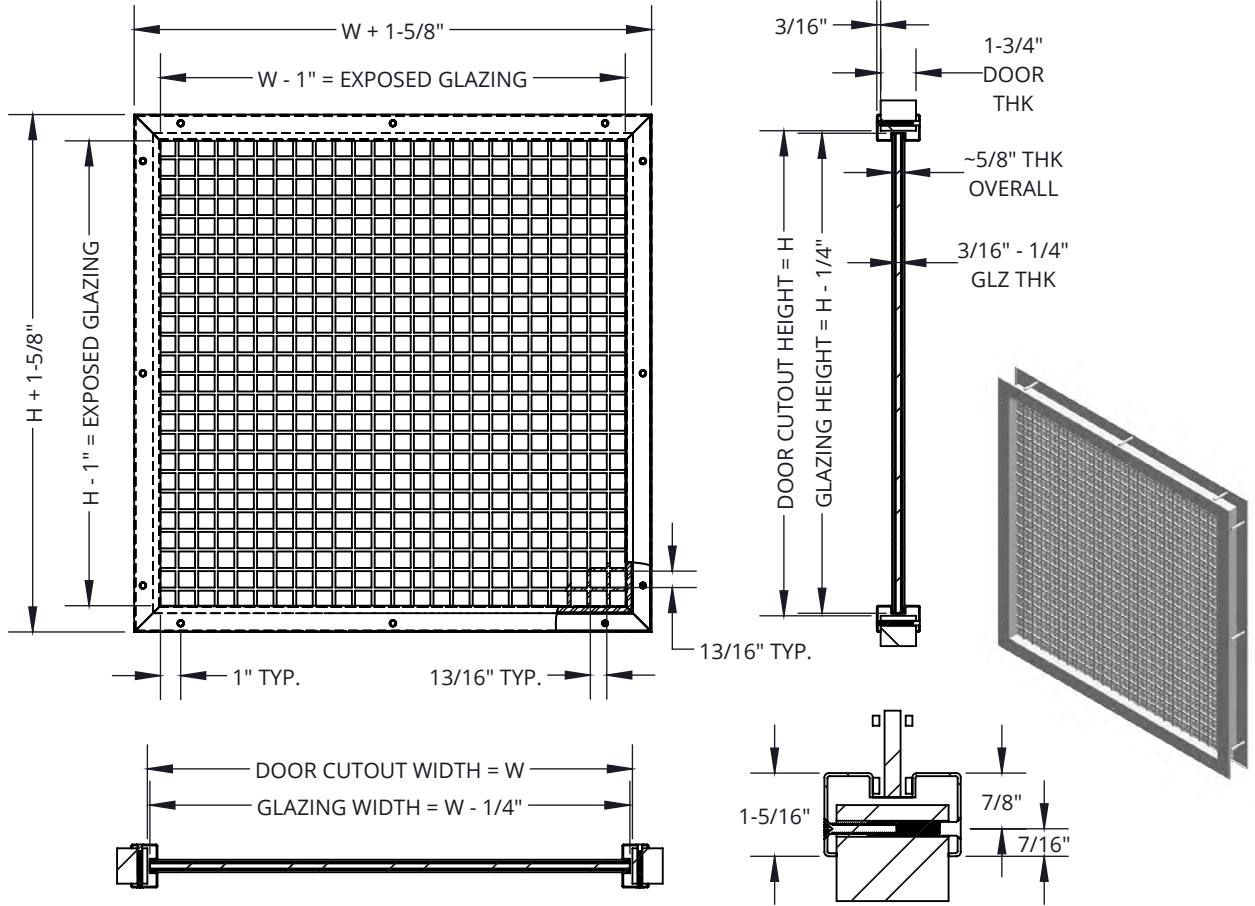

SPECIFICATIONS

Application: For door thickness 1-3/4" and glazing thickness 3/16" - 1/4"

Frame Material: 18 gauge cold rolled steel
Grille Material: 12 gauge (.105") cold rolled steel with 13/16" square openings. Two grilles included, each welded to inside frames of vision lite.

Standard Finish: Mineral bronze powder coat
Fasteners: #8 x 32" Flathead Phillips head thru-bolts with blank head on one side to match finish

Size:
Minimum: 4" x 4"
Maximum: 48" x 48"
 Door Cutout = Order Size (W x H)
 Glazing Size = Order Size minus 1/4" (W - 1/4" x H - 1/4")
 Exposed Glazing = Order Size minus 1" (W - 1" x H - 1")

FIRE RATINGS:
 UL listed and labeled/stamped to ANSI/UL 10B, ANSI/UL 10C and CAN/ULC S104 when properly installed in rated and approved door. Ratings up to 180 minutes can be achieved depending on exposed glazing size and area.


OPTIONS:
Materials: Galvanneal steel, zinc-plated steel
PAKS: Vision lite, glazing & glazing tape combined
Compatible Air Louvers Glazing:
Fire-Rated: PPF, FL, FGL, WS
Non-Rated: TEMP
Other: Torx screws

TAPE WHEN SOLD SEPARATELY

Qty	Model	Description Dimensions
	GTAPE 200B	Standard glazing tape 1/16" 1/16" thick x 3/8" wide x 200 ft
	FGS3000S90	Intumescent tape for wired glass 5/64" thick x 7/16" wide x 16 ft


Refer to glazing tape submittal for more information

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.

 <p>AIR LOUVERS 9702 Newton Avenue S, Bloomington, MN 55431</p>	800-554-6077 sales@activarcpg.com www.activarcpg.com	Distributor: _____ Contractor: _____ Date: _____ Scale: N/A	Project: _____ Approved By: _____ Architect: _____ Item#: _____	
	Page 1 of 2			
	© 2026 Activar Construction Products Group, Inc.		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.	
			2-25-2026	

UP TO 3 HOURS

VISION LITE - THRUBOLT™ WITH 12 GAUGE SECURITY GRILLES - VLFSG

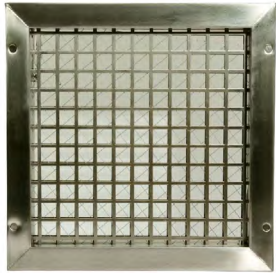

VLFSG 1212SI

MADE-TO-ORDER THRUBOLT VISION LITE - EXAMPLE: VLFSG 1826B

QTY	MODEL	MATERIAL	WIDTH	HEIGHT	FINISH	PAK GLAZING OPTIONS	OPTIONS
	VLFSG	Cold Rolled Steel - Std.			B Bronze - Std.	None	None
		G Galvannealed Steel			AB AMS Beige	FL PAK 3/16" FireLite NT	-T Torx Screw
		E Zinc-Plated Steel			SB SC Beige	PPF PAK 3/16" Pyran Platinum F	
					S Sand	FGL PAK 1/4" Fireglass 20	
					G Gray	TEMP PAK 1/4" Tempered	
					SI Silver	WS PAK 1/4" Wireshield	
					W White	Other PAK - specify below:	
					BK Black		
					FB Flat Black		
					BA Brass		
					Other - specify below:		

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.